

Descrizione / Description / Description

Orinatoio elettronico a muro con alimentazione solamente a batteria

Wall-mounted electronic urinal powered only by batteries

Urinoir mural électronique avec alimentation seulement par batteries

Materiali / Materials / Matériels

Componenti in finitura
Finishing components
Composants en finition

Ottone/Brass/Laiton

Componenti torniti
Machined components
Composants tournés

Ottone/Brass/Laiton

Guarnizioni
Gaskets
Joints

EPDM

Componenti plastica
Plastic components
Composants en
plastique

POM

Finitura superficiale
Surface finishing
Finition de la surface

Conforme/According/Conformément EN 248

In accordo alla EN 9227 in merito all'aggressione salina
According to EN 9227 regarding saline aggression
Conformément à la norme EN9227 concernant l'agression saline


Caratteristiche flussometri con sensore IR
Features flush valve with IR sensor
Comprend des robinet de chasse avec capteur IR

Distanza di esercizio Operating distance Distance de fonctionnement	0.5-70	Cm
---	--------	----


Tempo di apertura Opening time Temps d'ouverture	2	sec
--	---	-----


Pre risciacquo Pre rinse Pré-rinçage	2	sec
--	---	-----

Immagine / Picture / Image

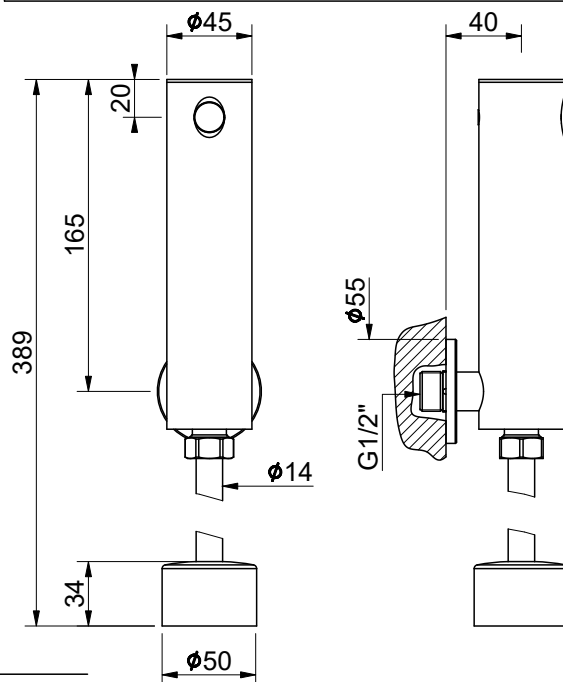


Caratteristiche / Features

	5 - 70 °C
--	-----------

	4x1,5V AA Lithium
---	-------------------

	0,25 l/s (3 bar)
--	------------------

	Min 0.5 - Max 6 (Recommended 2-4) bar
--	---------------------------------------

RUBINETTERIE MCM Int. S.r.l.
via dell'Acacia, 54/56 - 28021 Borgomanero (NO)
Tel : +39 0322 843060 - Fax : +39 0322 831613
E-mail : info@mcmtaps.it - web : www.mcmtaps.it
P IVA : IT017877240033



Art. 7034

1703400R00CR00000 2



100% Made in Italy