
SPECIFICATION SHEET



COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T128/3-H-XBNK





SHOWER TYPE

Shower Valve

VALVE TYPE

Concealed

ORIENTATION

Horizontal

NUMBER OF OUTLETS

10utlet

WITH ALL-FLOW FUNCTION

Yes

WITH INTEGRATED DIVERTER

No

COMPATIBLE WITH STUDFAST

Yes

WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

No

WITH SHOWER KIT

No

tel: 01934 74466 email: sales@vado.com

www.vado.com





SPECIFICATION SHEET

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T128/3-H-XBNK

INCLUDES MORTAR / TILE GUARD

Yes

COMPATIBLE WITH EASY-FIX BRACKETS

No

WITH THERMOSTATIC TECHNOLOGY

Yes

INSTALLATION TOLERANCES

min-max wall mount 75-100mm optimum installation depth 87mm

CONNECTIONS / FITTINGS

 $2\times3/4"$ female inlets / $3\times3/4"$ female outlets includes 3/4" - 1/2" adaptors

SPARE PARTS

thermostatic cartridge V-704-34S diverter cartridge FL-802-33/2MX flow cartridge FL-301-RTC

MOUNTING

Wall Mounted

PLUMBING SYSTEM SUITABILITY

Gravity System, Pumped System, Combination Boiler, Pressurised System

COLLECTION NAME

Knurled X Fusion

FINISH


Black/Nickel

MINIMUM OPERATING PRESSURE

0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

GUARANTEE

15 Year Guarantee




www.vado.com





TECHNICAL DRAWING

COLLECTION: KNURLED X FUSION PRODUCT CODE: IND-T128/3-H-XBNK

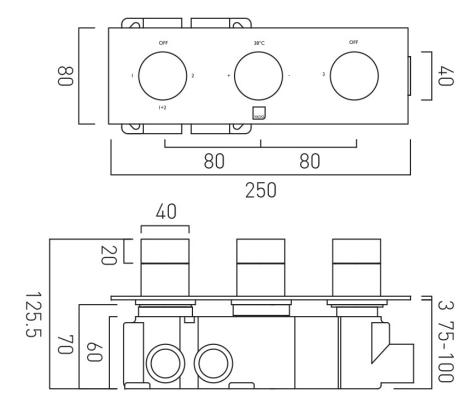

tel: 01934 744466 email: sales@vado.com

www.vado.com

